


Alpha IP: Switch Actuator and Meter – flush-mount (5A) FSM 26001-N0

The Alpha IP Switch Actuator and Meter offers installation with a flush-mounting or surface-mounting box. Once installed, the device switches connected loads (e.g. lamps) on and off and measures the energy consumption.

The switch actuator and meter enables comfortable control of connected loads via smartphone app. With the corresponding user interface, you can have an overview of the energy consumption and costs of connected loads.

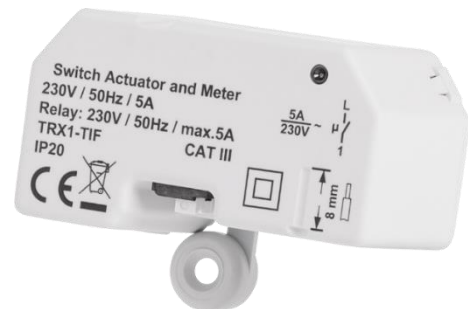

1.1 Product characteristics

- Flush-type actor for switching consumers and measuring the energy consumption
- Thanks to the high measuring accuracy, also standby loads can be measured precisely
- Compact design for a simple installation in flush-type boxes or in on-surface junction boxes (e. g. ELS Spelsberg Abox 25)
- Convenient control via the Alpha IP app or via the Alpha IP remote control
- Can be used with the Access Point in conjunction with the Alpha IP app

1.2 Scope of supply

- Alpha IP Switch Actuator and Meter – flush-mount
- Operating instructions

2 Technical data

Supply voltage	230 V/50 Hz
Switching current	5 A max.
Standby power consumption	0,2 W
Max. switching power	1150 W
Load type	ohmic load, $\cos\varphi \geq 0,95$
Cable type and cross section	Rigid and flexible cable, 0,75-1,5 mm ²
Relais	NO contact, 1-pole, μ contact
Measuring accuracy (power)	Range: 0 to 1150 W Resolution: 0,01 W Accuracy: 1 % \pm 0,03 W
Installation	only in switch boxes (device boxes) in accordance with DIN 49073-1 or ELS Spelsberg junction boxes (surface-mounting boxes) in accordance with DIN 60670-1 (Abox 25 and Abox 40 for example)
Protection type	IP20
Ambient temperature	-10 bis +55 °C
Dimensions (W x H x D)	54 x 33 x 41 mm
Weight	45 g
Radio frequency	868,3 MHz/869,525 MHz
Typical radio free-field range	130 m
Packaging dimensions	122 x 112 x 48 mm
Packaging weight	118 g